


Configuring stateless autoconfiguration

You have a junior network engineer and your task is to help him configure hosts to use stateless autoconfiguration. The network prefix you need to configure must start with 2001:982E:8712:7623:: / 64

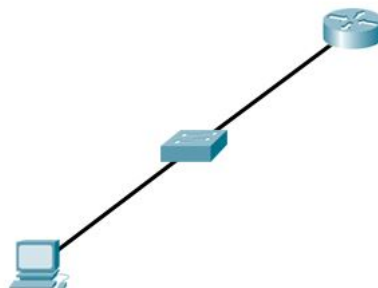

Link de download da questão: <https://drive.google.com/open?id=0BzmYQVmw4W7nQWJpbUIOS0RLVUU>
(<https://drive.google.com/open?id=0BzmYQVmw4W7nQWJpbUIOS0RLVUU>).

(Você precisará do Packet Tracer para essa questão)